

ally ip100[™]


Installation Guide

Before you start:

- A.** Setup for the Arxceo Ally ip100 requires an active Internet connection*. A simple way to test whether a connection exists is to first open a browser on a computer that will be located on the protected (LAN) side of the Arxceo Ally ip100 and web surf to a site on the Internet. If that is successful, then install the Arxceo Ally ip100 on a 100Mbit (100BaseT) connection somewhere between the computer you just used and the Internet.
- B.** You must use Internet Explorer version 5.0 or higher to access all the features of the management interface.
- C.** Only use the power supply provided with your Arxceo Ally ip100.
- D.** Additional documentation is available at www.arxceo.com/support

- ① Power OFF all devices to be connected to the Arxceo Ally ip100.


Local Network

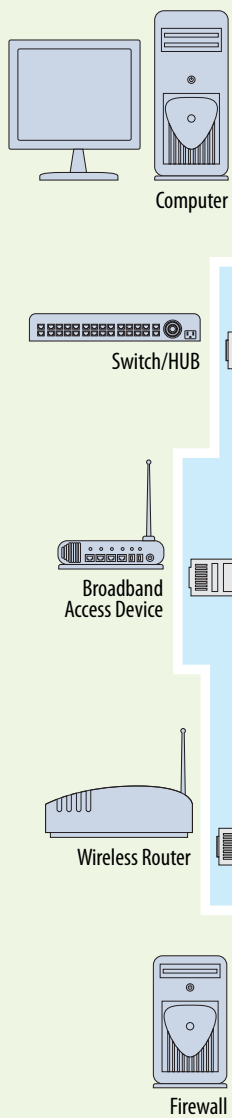

Local Network

- ② Connect devices to the Arxceo Ally ip100 using appropriate cables as indicated.

Internet

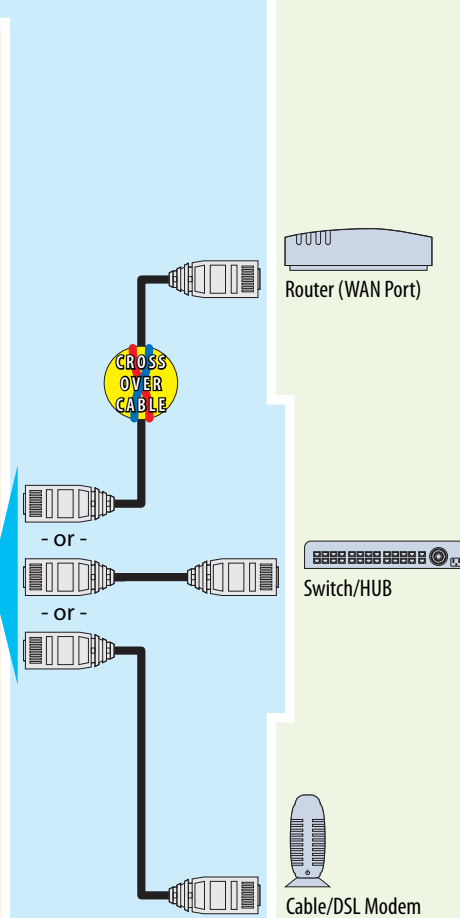

Internet


- ③ Power ON the Arxceo Ally ip100, then wait at least 30 seconds before applying power to the connected devices.



The LED indicators will light up. (LEDs may blink periodically indicating that network traffic is being handled. If one end is entirely dark return to STEP 2 and reconnect using a different type of cable on the same end.)

- ④ Return to the computer used in STEP A and launch Internet Explorer V5.0 or higher. Wait 2 minutes after you have applied power to the Arxceo Ally ip100 in STEP 3.** Next you will access the management console.

(NOTE: When connecting the Arxceo Ally ip 100 for the first time a connection to the Internet is required.)

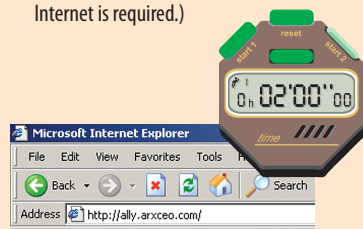

- ⑤ Key in: <http://ally.arxceo.com> into the URL field of the Internet Explorer browser and wait for the first Ally management page to appear. Log in using username: **administrator** and password: **arxceo**. You will be prompted to accept the End User License Agreement (EULA), change the administrator password and set the system time. **IT IS VERY IMPORTANT THAT YOU DO NOT FORGET THIS PASSWORD**. After the EULA has been accepted and the password has been changed you will be prompted to set the time on your Arxceo Ally ip100. This time setting will be used for the events in the log. The unit will pull in the time from the computer you are using to manage it. You can choose to use this time or assign a specific time you wish to be used.

(NOTE: The Arxceo Ally ip100 does not apply security protection until the EULA has been accepted the first time.)

* This method of accessing the management interface avoids the requirement of changing any IP addresses on your network. Once you are accessing the management interface, you have the ability to assign a static IP address for installation into a test environment or other isolated network. If you cannot initially install the unit in this fashion, please print and follow the instructions located here: www.arxceo.com/ip100_install

** Arxceo's Ally ip100 uses an embedded micro-web server to provide management access. In order to provide immediate security and rapid processing upon a reboot, the micro-web server service is started with a low priority and takes approximately 2 minutes before fully available.

