


LINDY®

COMPUTER CONNECTION TECHNOLOGY

LowProfile PCI USB 2.0 2 port

User Manual

English

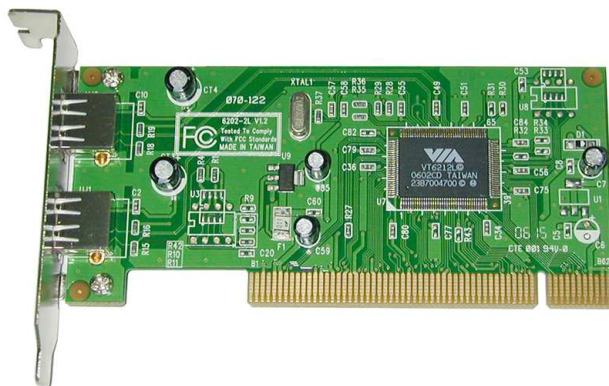

LINDY No. 51068

www.LINDY.com



© LINDY ELECTRONICS LIMITED & LINDY-ELEKTRONIK GMBH - FIRST EDITION (Dec. 2007)

USB Port Features

Compliant with USB specification Revision 2.0

- Compliant with EHCI specification Revision 0.95
- Compliant with UHCI specification Revision 1.1
- PCI multi-function device consists of two UHCI Host controllers For full/low-speed (12/1.5Mbps) signaling and one EHCI Host Controller core for high-speed signalling.
- 4 downstream facing ports in the root hub with integrated physical layer transceivers shared by UHCI and EHCI Host controllers
- Supports PCI-Bus Power Management interface specification release 1.1
- Legacy support for all downstream facing ports.

System Requirements

This USB card is made exclusively for the IBM-PC or compatible line of computer. If you are not sure what type of computer you have, check your system documentation for compatibility.

Package Contents


This LowProfile PCI USB Card package includes the following:

- Installation Guide • Lowprofile PCI USB Card • Driver CD

Software:

- Windows® 98SE/ME/2000/XP driver CD ROM or (Pentium® IV)VISTA
- Please make sure that all of these items are presented. If anything is missing, contact your vendor for assistance.

Configuration The PCI USB Card


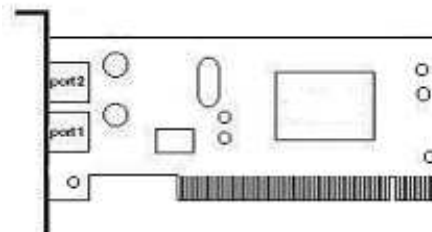


The ports are labeled as 'UJ1', 'UJ2' for the USB connectors, These ports are where you physically connect your hardware (mouse, keyboard, etc).

This section provides information on how to install the Super PCI I/O drivers for the following operating systems:

Windows® 98/Me Driver Installation

1. At the Add New Hardware Wizard windows®, click on “**Next**”
2. Select the option “**Search for the best driver for your devices(Recommend)** “ and click on “**Next**”

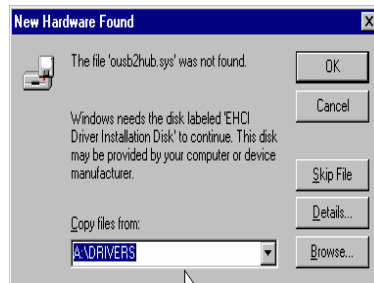


3. Select the option “**Specify the location**” and type in **D:(CDROM):\51068\Win_drv\SETUP.EXE** click on “**Next**”
4. Click “**Next**” and then “**Finish**” respectively.
5. Remove the diskette, then select “**Yes**” to restart the computer for the setup to take effect.

To verify successful installation in Windows® 98/Me:

1. From the main desktop, click on “**My Computer**”, then double-click on “**Control Panel**, **System**”, and “**Device Manager**”.
2. Double-click on either “**Universal Serial Bus controllers**” options “**USB 2.0 Root Hub device**” or “**VIA Tech PCI to USB Universal Host Controller**” should be displayed when successfully installed. The port is ready to connect new device.

Windows® Me installation error message:

<◆>. After restarting your system, please check if your device works.



Note:


● If there is a yellow exclamation mark on “VIA USB 2.0 Enhanced Host Controller” or “USB 2.0 Root Hub Device”, please remove this item from the “Device Manager” by clicking the “Uninstall” button and click “Refresh” to re-install this driver again.

● The “green question mark” on “VIA USB 2.0 Enhanced Host Controller” item is not an error message. Please ignore it.

Windows 2000 Driver installation

1. At the Add New Hardware Wizard windows®, click on “**Next**”
2. Select the option “**Search for the best driver for your devices (Recommend)** “ and click on “**Next**”

3. Select the option “**Specify the location** “ and type in **D:(CDROM):\51068\Win_drv\SETUP.EXE** then click on “**Next**”
4. Click “**Next**” and then “**Finish**” respectively.
5. Remove the diskette, then select “**Yes**” to restart the computer for the setup to take effect

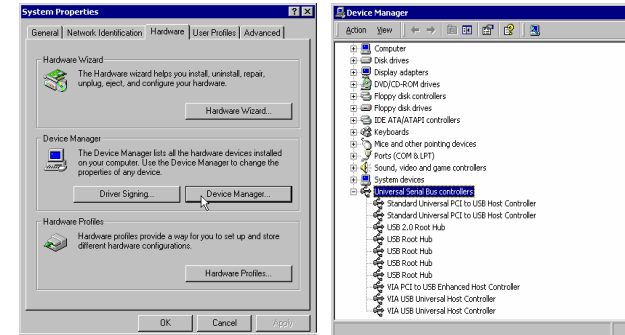


To verify successful installation in Windows® 2000:

1. From the main desktop, click on “**My Computer**”, then double-click on “**Control Panel**, **System**”, and “**Device Manager**”.
2. Double-click on either “**Universal Serial Bus controllers**” options “**USB 2.0 Root Hub device**” or “**VIA Tech PCI to USB Universal Host Controller**” should be displayed when successfully installed. The port is ready to connect new device.

Windows XP Driver installation

1. At the Add New Hardware Wizard windows®, click on “**Next**”
2. Select the option “**Search for the best driver for your devices (Recommend)** “ and click on “**Next**”
3. Select the option “**Specify the location** “ and type in **D:(CDROM):\51068\Win_drv\SETUP.EXE** then click on “**Next**”
4. Click “**Next**” and then “**Finish**” respectively.
5. Remove the diskette, then select “**Yes**” to restart the computer for the setup to take effect

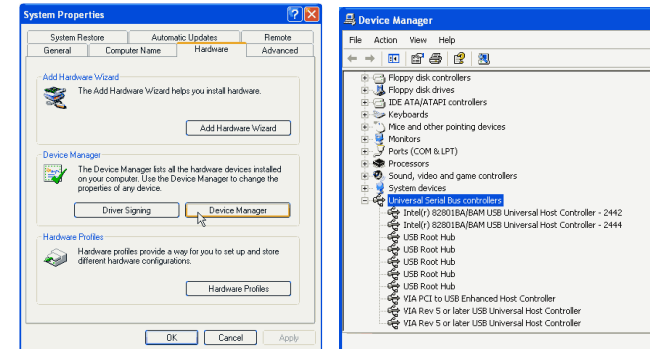

To verify successful installation in Windows® XP:


1. From the main desktop, click on “**My Computer**”, then double-click on “**View System information**”, and “**Hardware**” to “**Device Manager**”.
2. Double-click on either “**Universal Serial Bus controllers**” options “**USB 2.0 Hoot Hub device**” or “**VIA Tech PCI to USB Universal Host Controller**” should be displayed when successfully installed. The port is ready to connect new device.

Windows Vista Driver Installation:

1. Start power to RUN VISTA
2. Windows will automatically detect you have a new device the first time you power on your PC and thus request the devices software drivers.



3. Detect you have device to Install device software
4. Install the driver “**your device are ready to use**”
5. Chlick “**Device Manager**” to “**Universal Serial Bus Controllers**” and the “**VIA Rev 5 or later USB Universal Host Controller** ” &”**VIA USB Enhanced Host Controller**” should be displayed when successfully installed. The port is ready to connect new device.

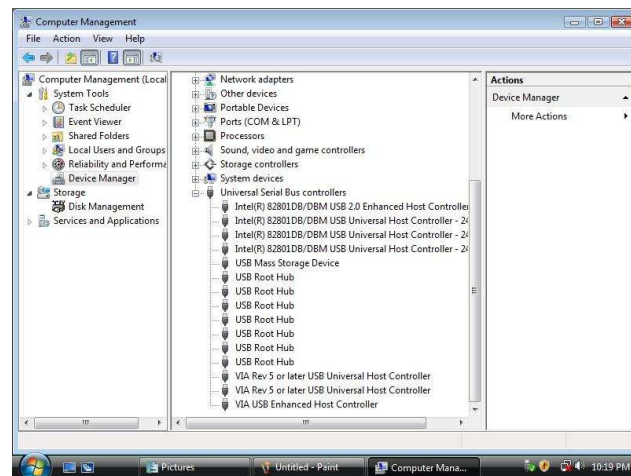

CE Statement

This device complies with the European Regulations for Electromagnetic Compatibility (EMC) of the European Union and it is equipped with the CE mark. This unit has to be used with high quality shielded connection cables. Only if such high quality shielded cables are used can you be sure that the EMC compatibility is not adversely influenced.

FCC Statement

Shielded cables must be used with this equipment to maintain compliance with radio frequency energy emission regulations and ensure a suitably high level of immunity to electromagnetic disturbances.

FCC Warning

This equipment has been tested and found to comply with the limits for a Class B Digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced technician for help

You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.



**WEEE (Waste of Electrical and Electronic Equipment),
Recycling of Electronic Products**

United Kingdom

In 2006 the European Union introduced regulations (WEEE) for the collection and recycling of all waste electrical and electronic equipment. It is no longer allowable to simply throw away electrical and electronic equipment. Instead, these products must enter the recycling process.

Each individual EU member state has implemented the WEEE regulations into national law in slightly different ways. Please follow your national law when you want to dispose of any electrical or electronic products.

More details can be obtained from your national WEEE recycling agency.

Germany / Deutschland

Die Europäische Union hat mit der WEEE Direktive umfassende Regelungen für die Verschrottung und das Recycling von Elektro- und Elektronikprodukten geschaffen. Diese wurden von der Bundesregierung im Elektro- und Elektronikgerätegesetz – ElektroG in deutsches Recht umgesetzt.

Dieses Gesetz verbietet vom 24.März 2006 an das Entsorgen von entsprechenden, auch alten, Elektro- und Elektronikgeräten über die Hausmülltonne! Diese Geräte müssen den lokalen Sammelsystemen bzw. örtlichen Sammelstellen zugeführt werden! Dort werden sie kostenlos entgegen genommen. Die Kosten für den weiteren Recyclingprozess übernimmt die Gesamtheit der Gerätehersteller.

France

En 2006, l'union Européenne a introduit la nouvelle réglementation (WEEE) pour le recyclage de tout équipement électrique et électronique.

Chaque Etat membre de l' Union Européenne a mis en application la nouvelle réglementation WEEE de manières légèrement différentes. Veuillez suivre le décret d'application correspondant à l'élimination des déchets électriques ou électroniques de votre pays.

Italy

Nel 2006 l'unione europea ha introdotto regolamentazioni (WEEE) per la raccolta e il riciclo di apparecchi elettrici ed elettronici. Non è più consentito semplicemente gettare queste apparecchiature, devono essere riciclate.

Ogni stato membro dell' EU ha tramutato le direttive WEEE in leggi statali in varie misure. Fare riferimento alle leggi del proprio Stato quando si dispone di un apparecchio elettrico o elettronico.

Per ulteriori dettagli fare riferimento alla direttiva WEEE sul riciclaggio del proprio Stato.



No. 51068
www.lindy.com