



COMPUTER CONNECTION TECHNOLOGY

USB VoIP LCD Phone

User Manual

English



LINDY No. 42981

www.lindy.com



© LINDY ELECTRONICS LIMITED & LINDY-ELEKTRONIK GMBH - FIRST EDITION (Feb 2007)



Introduction

Thank you for purchasing the LINDY USB VoIP Phone with LCD. This phone has been designed primarily for use with Skype, but can also be used with other VoIP applications. You can control the Skype software by simply pressing the keys on the phone to select phone listing and dialling function. With the in-built echo eliminating technology, voice clarity is vastly improved.

Features

- LCD display caller ID contact lists and calling lists
- USB 1.1 & 2.0 specification compliant
- Compatible with VoIP (Voice over Internet Protocol) solutions, such as Skype, MSN Messenger and Yahoo Messenger
- Built in hot key functions to operate Skype software as easy as dialing a normal telephone.
- Skype hot key: up, down, 0 ~ 9 #, Dial, Hang Up, hold, info.
- Built in speaker and microphone
- Echo-eliminating for better sound quality
- Optional buzzer function for incoming call alerts


System Requirements

- Processor: PC 1GHZ or over
- Storage: 128MB RAM 15MB Hard Disk
- Internet service: ISDN, ADSL or LAN
- Operating System: Microsoft Windows 2000/XP/Vista with Direct X 9.0C or over
- Skype Software Version: 2.0 or over

Package Contents


- USB phone
 - Installation CD (API Software and manual)
 - This manual
-

Function Keys

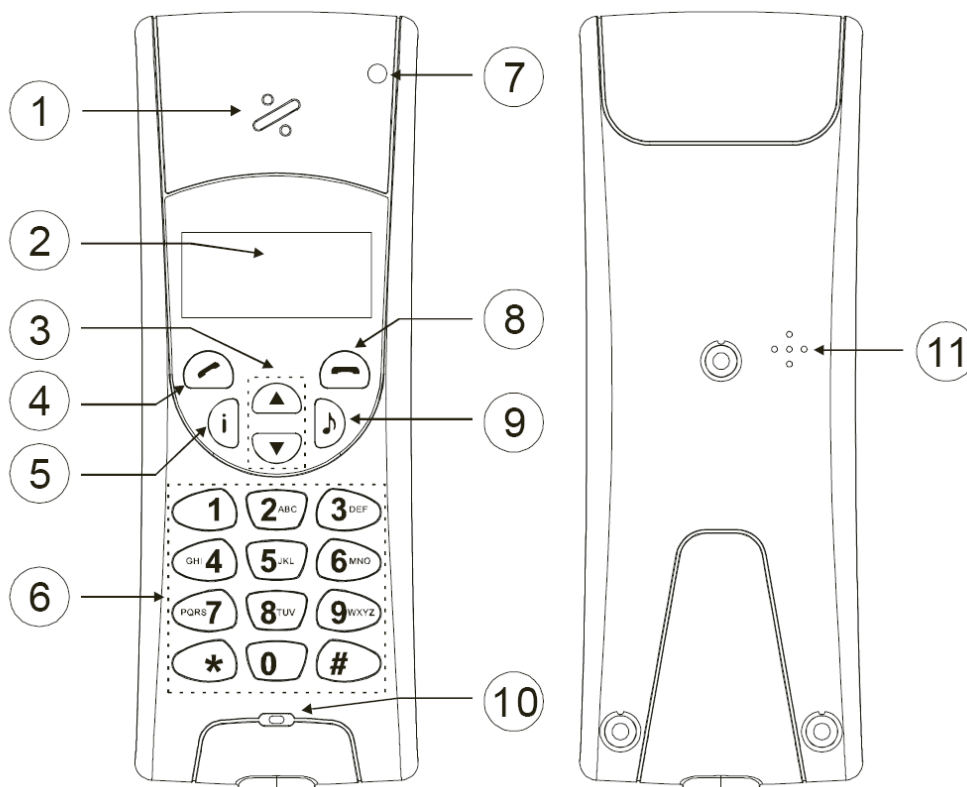

1	Speaker	Speaker	
2	LCD Screen	Display information of call status	
3	Up/Down Button	Select from contact list, missed call list, called list	
4	Dial	Off-hook	Make or answer a call
		Enter	Sub-menu entering
		Confirm	Option setting
5	Info	Skype information hot key	
6	Number Button	Number dial out button	
7	LED	Ringing LED	
8	Hang Up	On-hook	Hang-up a call
		Cancel	Escape sub-menu
		Clear	Press & hold to delete all dialed numbers
			Press once to delete one dialed number
9	Hold	Hold or mute hot key	
10	Microphone	Microphone	
11	Buzzer	Incoming call ringer	

Function Keys

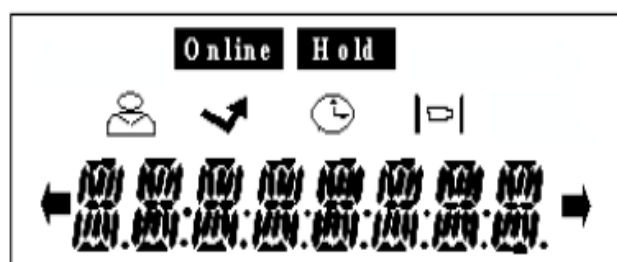

	Show Contact List UserName / Alias Name.
*  key to select last / next user. *  key to see this user's mobile / home / office number. * Hang Up () key to make a phone call.	
	Show Miss Call List UserName / Alias Name.
*  key to select last / next user. *  key to see this user's mobile / home / office number. * Hang Up () key to make a phone call.	
	Show Call List UserName / Alias Name.
*  key to select last / next user. *  key to see this user's mobile / home / office number. * Hang Up () key to make a phone call.	
	Volume Set. → 8 level Name Set. → UserName / Alias Key Tone Set. → Key Tone On / Off Ring Set. → 10 melodies + PC ring tone Ring Volume → 6 level Hold Melody Set. → 5 melodies + Mute
Onlin	Show Call List User's Online Status.
Hold	Hold This Call.

Installation

1. Hardware Installation


Please connect the USB VoIP Phone to your computer's USB port. Your computer will find a USB Audio Device. Once the driver is installed the LCD on the USB phone will show the time.

2. Installing Skype Software


If Skype is not yet installed on your computer, please download the latest version of the software from www.skype.com and install it on your computer. If you experience any problems while installing this software then please refer to the Skype website.

3. Installing the API Software


- 3.1 Insert the Utility CD into your CD-ROM drive. Double Click My Computer and then choose the CD-ROM drive.




- 3.2 Run the setup icon to start the installation.




- 3.3 Please click Next.

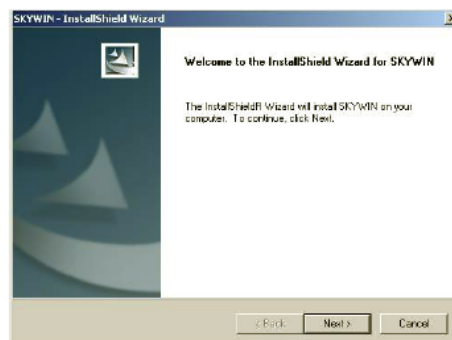

- 3.4 Please click Next.

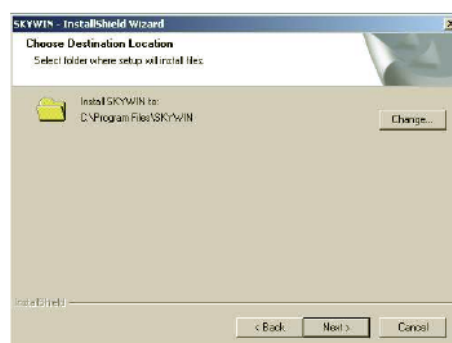


3.5 Click Finish to complete the installation.

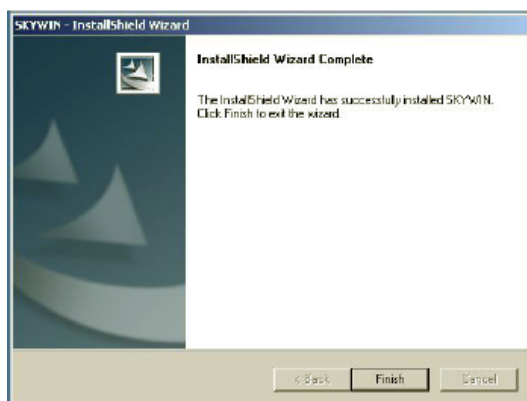

3.6 Once installation is complete, double click the SkyWin icon to start the program.



3.7 When the screen appears “Another program wants to use Skype”. Select “Allow this program to use Skype” and click the OK button.

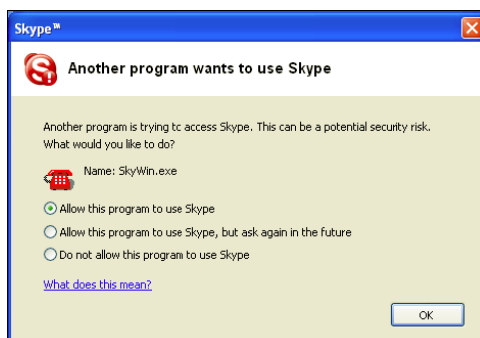

Note:


If you accidentally select the “Do not allow this program to use Skype” option, open the Skype window and take these steps: Click “Tools ► Options ► Privacy ► Manage other programs access to Skype”, Select “SKYWIN.EXE” and click “Change”. Select “Allow this program to use Skype” and click the OK button.

3.8 When you have finished installing the API software, a small icon will appear in the system tray. The icon displays the status for USB phone, as follows:

	USB Phone In-used / Skype On-line
	Can't Find USB Phone
	Can't Find Skype
	Skype Isn't installed

4. Setting Audio and Sound Device

Open the Skype window, click “Tools ► Options ► Sound Devices”. In the options “Audio In” and “Audio Out”, please select USB Audio Device, then click Save.

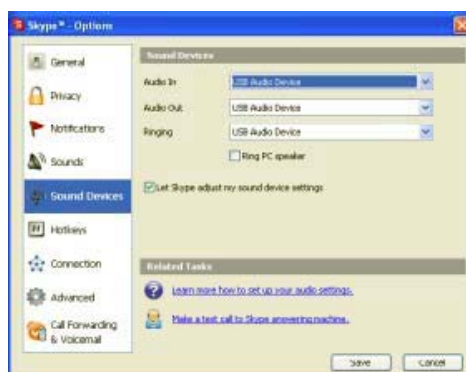

5. Using the Handset

5.1 LCD Menu Functions

In clock mode, press the Dial (📞) to enter the Skype table and press up/down (⬆️ ⬇️) to select an option in the table.

When you are finished, press the Hang-up (📞) button to quit.

CONTACT			Contact list.
MISSLIST			Missed calls.
CALLLIST			Calls list.
OPTION	VOL SET	0~7	8 level volume adjustment.
	HOLD SET	HOLD MUTE	Mute
		HOLD 01~5	5 hold melodies.
	RING SET	RING 01~10	10 types of ring
		RING PC	Remain PC default.
	KEY TONE	TONE OFF	Turn off key tone.
		TONE ON	Turn on key tone.
	NAME SET	USERNAME	User's account.
		ALIAS	Nickname.
	RING VOL	0~5	The volume of ring.

5.2 Calling a Skype User

Press Dial (📞) to select contact, miss list or call list of the Skype table.

You may press the (⬆️ ⬇️) key to scroll the list. Then press Dial (📞) key to dial your target user via Skype.

If you want to cancel the dialing, you may press Hang Up (📞) key at any time.

5.3 Calling a Phone Number (Skype Out)

Before using this function, please make sure you have paid for the service. For further information about Skype Out, please go to website <http://www.skype.com>
Dial the phone number by pressing the USB phone keypads.
Press the Dial (☎) key to call the number.

Note:

You must include the “country code” + “area code” (leaving out the leading zero) + “number” e.g. “0044” “1642” “754000”

5.4 Answer a Call

When receiving an incoming call, Press the Dial (☎) key to answer the call.

5.5 Adjust Volume

On-line


Use the UP/Down (▲ ▼) button to control the volume while calling another user.

Off-line

Click “OK►Option►Vol Set” to adjust the volume.

5.6 Assign Speed-Dial

Open the Skype window, right-click the user name on the contact list and select set Speed-Dial.

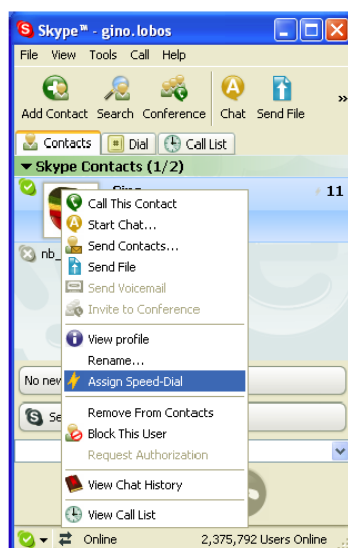

Set the speed dial number, example “11” and press OK.



To use speed dial on the handset, dial “11”. Then press the Dial (☎) key to make a call to this contact.

6. Other IM Software Settings

6.1 MSN Messenger

Open MSN Messenger, Click “Tools” and select “Audio and Video Setup...”. Then follow the wizard to select the USB phone and test.

6.2 Yahoo Messenger

Open Yahoo Messenger, Click “Yahoo! Audio Setup Wizard” item. Then test the USB phone’s speaker and microphone.

Troubleshooting

Q1 Skype is launched, but it has no response when I pick up the handset and press a key using my USB phone

A1. Make sure your Skype is allowed to be accessed by the provided API. Please refer to point 3 installing the API software.

Q2. While using messenger software or Skype, the voice is played from the PC sound card instead from the USB phone.

A2. Make sure your software is configured to USB phone as audio device. Refer to point 4 Setting Audio and Sound device.

In MSN Messenger please refer to point 6.1 MSN Messenger setting.

In Skype please refer 3 Install the API software

Q3. There is no audio from my speakers when I play music?

A3. Please go to your Control Panel/Sound and Audio Devices, set Sound playback and Sound Recording’s preferred device to your sound card, as shown below:



Certifications**FCC Certifications**

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at their own expense.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received; including interference that may cause undesired operation.

CE Certification

This equipment complies with the requirements relating to electromagnetic compatibility, EN 55024 and EN55022 class A for ITE, EN61000-3-2/-3 the essential protection requirement of Council Directive 89/336/EEC on the approximation of the laws of the Member States relating to electromagnetic compatibility.

Recycling Information

WEEE (Waste of Electrical and Electronic Equipment),
Recycling of Electronic Products

United Kingdom

In 2006 the European Union introduced regulations (WEEE) for the collection and recycling of all waste electrical and electronic equipment. It is no longer allowable to simply throw away electrical and electronic equipment. Instead, these products must enter the recycling process. Each individual EU member state has implemented the WEEE regulations into national law in slightly different ways. Please follow your national law when you want to dispose of any electrical or electronic products. More details can be obtained from your national WEEE recycling agency.

Germany / Deutschland

Die Europäische Union hat mit der WEEE Richtlinie umfassende Regelungen für die Verschrottung und das Recycling von Elektro- und Elektronikprodukten geschaffen. Diese wurden von der Bundesregierung im Elektro- und Elektronikgerätegesetz – ElektroG in deutsches Recht umgesetzt. Dieses Gesetz verbietet vom 24. März 2006 an das Entsorgen von entsprechenden, auch alten, Elektro- und Elektronikgeräten über die Hausmülltonne! Diese Geräte müssen den lokalen Sammelsystemen bzw. örtlichen Sammelstellen zugeführt werden! Dort werden sie kostenlos entgegen genommen. Die Kosten für den weiteren Recyclingprozess übernimmt die Gesamtheit der Gerätehersteller.

France

En 2006, l'union Européenne a introduit la nouvelle réglementation (WEEE) pour le recyclage de tout équipement électrique et électronique.

Chaque Etat membre de l' Union Européenne a mis en application la nouvelle réglementation WEEE de manières légèrement différentes. Veuillez suivre le décret d'application correspondant à l'élimination des déchets électriques ou électroniques de votre pays.

Italy

Nel 2006 l'unione europea ha introdotto regolamentazioni (WEEE) per la raccolta e il riciclo di apparecchi elettrici ed elettronici. Non è più consentito semplicemente gettare queste apparecchiature, devono essere riciclate. Ogni stato membro dell' EU ha tramutato le direttive WEEE in leggi statali in varie misure. Fare riferimento alle leggi del proprio Stato quando si dispone di un apparecchio elettrico o elettronico.

Per ulteriori dettagli fare riferimento alla direttiva WEEE sul riciclaggio del proprio Stato.

LINDY No. 42981

1st Edition February 2007



www.lindy.com